


HALOLINE® ECO

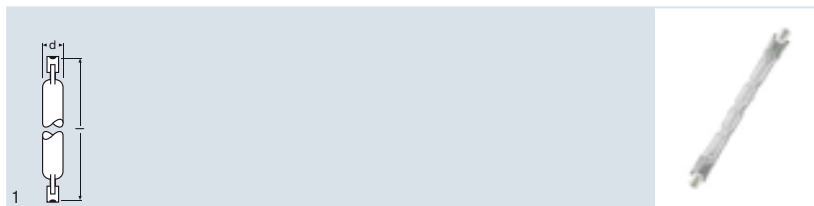

Product reference	Product number	W	V	lm				K			
64684 ECO ¹⁾	4008321977595	48	230	750	R7s	74.9	12	2900	2.0	20	1
64690 ECO ¹⁾	4008321928078	80	230	1400	R7s	74.9	12	2900	2.0	20	1
64695 ECO ¹⁾	4008321928092	120	230	2250	R7s	74.9	12	2900	2.0	20	1
64696 ECO ¹⁾	4008321977670	120	230	2250	R7s	114.2	12	2950	2.0	20	1
64698 ECO ¹⁾	4008321977755	160	230	3100	R7s	114.2	12	2950	2.0	20	1
64701 ECO ¹⁾	4008321207692	230	230	5000	R7s	114.2	12	2950	2.0	20	1
64702 ECO ¹⁾	4008321207715	400	230	9000	R7s	114.2	12	2950	2.0	20	1

¹⁾ Fuse protection with the indicated values is recommended on the fixture side (as per IEC 60357, EN 60357) | Enclosed fixtures must be used for both indoor and outdoor applications.

HALOLINE® ECO from OSRAM is the classic lamp for small outdoor systems for floodlighting buildings and sports arenas and for security lighting. It is also experiencing a renaissance in the home.

Product characteristics


- Average life: 2,000 h
- Dimmable
- Color rendering index R_a: 100
- Base: R7s

Product benefits

- Brilliant ECO accent lighting
- Direct replacement for standard halogen lamps
- Significantly lower CO₂ emissions
- Lower thermal output (compared with the standard reference product)
- Ideal for emphasizing and accentuating the structure of a room
- No transformer required
- Contains no mercury, can be thrown away with normal household waste

Applications

- General illumination
- Entrance lighting
- Path lighting
- Garden lighting
- Drive-over applications
- Shops
- Restaurants, hotels and similar prestige applications
- Offices, public buildings



Halogen lamps

Product reference		lm	W	Page reference
HALOLINE® ECO				
64684 ECO	C	750	48	3.19
64690 ECO	C	1400	80	3.19
64695 ECO	C	2250	120	3.19
64696 ECO	C	2250	120	3.19
64698 ECO	C	3100	160	3.19
64701 ECO	C	5000	230	3.19
64702 ECO	C	9000	400	3.19
HALOLINE®				
64560	F	16100	750	3.20
64740	F	22000	1000	3.20
64760	F	33000	1500	3.20
64783	F	44000	2000	3.20
64784	F	44000	2000	3.20
HALOLUX® T ECO				
64860 T ECO	D	260	25	3.37
64861 T ECO	D	490	40	3.37
64862 T ECO	D	820	60	3.37

